

# FLC-3028G-8C4F-T-X2 | 28 Port Industrial Layer3 Gigabit Switch

## FEATURE HIGHLIGHTS

- 16G + 8G combo + 4G F(x) SFP Slot
- RSTP, MSTP, ERPS, LACP for Network Redundancy
- QoS CoS/DSCP to increase determinism
- Supports IGMP Snooping v1/v2/v3, up to 512 groups
- DHCP Relay Option 82 for IP address assignment
- SNMP v1/v2c/v3 for network management
- Supports Storm Protection
- USB storage for configuration-free replacement (optional)
- Industrial protocols Ethernet/IP and Modbus TCP



## DESCRIPTION

FLC-3028G-8C4F series has up to 24 RJ-45 gigabit ports and 8 Gigabit SFP ports from 16 gigabit, 8 giga combo, and 4 giga SFP port configuration. Its industrial design makes the equipment fanless and operating wide temperature for most of the industrial applications.

FLC-3028G-8C4F series provide superior security software feature sets, ie Radius, TACACS+, SSH, SSL and network redundancy such as RSTP, MSTP, G.8032 ERPSv2. Layer 3 routing features like static routing, RIP v1/v2, OSPF, VRRP are standard pack included in this switch.

For industrial automation application, industrial protocols Ethernet/IP and Modbus TCP could be handled via this particular switch for connecting PLC network. Time synchronization is also provided by IEEE1588v2. The variety of redundant dual power input in AC and DC gives more flexibility and reliability in different industrial environments.

FLC-3028G-8C4F series also has L2 software pack version, which has reduced L3 routing functionality for smaller network. This series also provides 8 port power over ethernet (PoE) with 30W per port as power sourcing equipment (PSE) with maximum 240W output in total for power device (PD).

# FLC-3028G-8C4F-T-X2 | 28 Port Industrial Layer3 Gigabit Switch

## SPECIFICATIONS

### Technology

Standards	IEEE 802.3 10BaseT
	IEEE 802.3u 100BaseTX
	IEEE 802.3ab 1000BaseT
	IEEE 802.3z 1000BaseX
	IEEE 802.3x Flow Control
	IEEE 802.3ad/802.1AX LACP
	IEEE 802.1D Spanning Tree Protocol
	IEEE 802.1w Rapid STP
	IEEE 802.1s Multiple STP
	ITU-T G.8032 / Y.1344 ERPS
	IEEE 802.1Q VLAN Tagging
	IEEE 802.1ad Stacked VLANs
	IEEE 802.1p Class of Service
	IEEE 802.1X Network Authentication
	IEEE 802.1AB LLDP
IEEE 1588 PTP	

Processing Type Store and Forward

### Switch Properties

Switch Fabric	56Gbps
Priority Queues	8 Queues
Jumbo Frame	9216bytes
MAC Table Size	16K
Packet Buffer	12Mbits
VLAN Table Size	4094
IGMP Group	512
ACL Group	512
VLAN IP Entries	64

### Software Feature

Network Redundancy	RSTP, MSTP, G.8032 ERPSv2, Port Trunking with LACP
Security	802.1X, RADIUS, TACACS+, SSL, SSH
Management	IPv4, IPv6, Web, Telnet, Serial Console, CLI, SNMP v1/v2c/v3, uPnP
Diagnostics	RMON, SNMP Inform/Trap, Syslog, SMTP, Port Mirroring, LLDP
Configuration	DHCP Server/Client, Relay Option 82, TFTP, USB (optional)
Filter	802.1Q VLAN, Q-in-Q, IGMP Snooping v1/v2/v3, IGMP Querier, Independent Vlan Learning
Time Sync.	NTP, IEEE1588v2 OC (Software Timestamp), BC (Software Timestamp), TC (Hardware Timestamp)
QoS	CoS, DSCP, WRR/SPQ Queuing, Storm Protection
Industrial Profiles	Ethernet/IP, Modbus TCP
L3 Switching	Static Routing, RIP v1/v2, RIPng, OSPF v2, OSPF v3, VRRP v2

# FLC-3028G-8C4F-T-X2 | 28 Port Industrial Layer3 Gigabit Switch

## SPECIFICATIONS

### Interface

RJ45 Port	16x 10/100/1000T(x), auto negotiation speed duplex mode, auto MDI/MDI-X
Combo Port	8x 10/100/1000T(x) with dual speed SFP combo port, auto media detect
Fiber Port	4x 1000F(x) SFP Slot
LED Indicators	Per unit: PWR1, PWR2(AC2/DC2), Fault, Ring Master, Ring State
	Ports: Link/Active with Green LED on the left, Speed on the right with highest speed(Amber), low speed(OFF)
Alarm Contact	1x relay output with current carrying capacity of 1A @ 24 VDC
Digital Inputs	1x isolated input from the electronics.
	+13 to +30V for state "1"
	-30 to +3V for state "0"
	Max. input current: 8mA
Button	Multiple functions reset button
Serial Console	1x RS232 in RJ45 connector with console cable, 115.2Kbps, 8N1
Storage	1x USB 2.0 storage for firmware update, configuration backup, restore, boot up and syslog

### Power Requirements

Operation Voltage	90~264VAC, 12~48VDC, redundant dual inputs
Connection	AC socket, DC 4-pin terminal block
Power Consumption	0.3A@110VAC, 0.82A@24VDC
Protection	Overload Current Protected, Reverse Polarity Protected

### Mechanical Construction

Enclosure	Aluminum / Steel met
Protection Class	IP30
Dimensions (WxHxD)	440x44x331 mm
Weight	4.80 kg
Mounting	Rack Mounting

### Environmental Limits


Operating Temperature	Extended: -40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (Non-Condensing)

# FLC-3028G-8C4F-T-X2 | 28 Port Industrial Layer3 Gigabit Switch

## SPECIFICATIONS

Regulatory Approvals	
EMI	FCC Part 15 Subpart B Class A CE EN 55032 Class A
EMS	IEC61000-4-2 (ESD)
	IEC61000-4-3 (RS)
	IEC61000-4-4 (EFT)
	IEC61000-4-5 (Surge)
	IEC61000-4-6 (CS)
IEC61000-4-8 (Magnetic Field)	
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	
MTBF	>100,000 hours
Warranty	5 Years

## DIMENSIONS (Unit=mm)

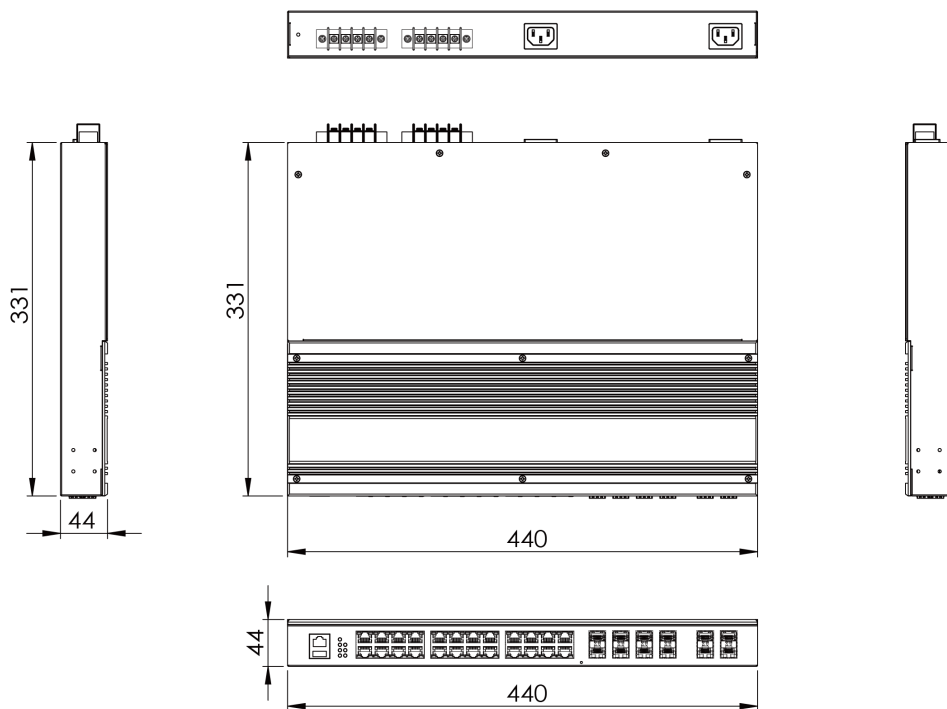

# FLC-3028G-8C4F-T-X2 | 28 Port Industrial Layer3 Gigabit Switch

## ORDERING INFORMATION

Model Name	Software (L2/L3)	10/100/1000 TX	Giga SFP	Power input
FLC-2028G-8C4F-AD-T-X2	L2	16	12 SFP(8 combo)	90-264VAC 12-48VDC
FLC-2028G-8C4F-AC-T-X2	L2	16	12 SFP(8 combo)	90-264VAC redundant
FLC-2028G-8C4F-DC-T-X2	L2	16	12 SFP(8 combo)	12-48VDC redundant
FLC-3028G-8C4F-AD-T-X2	L3	16	12 SFP(8 combo)	90-264VAC 12-48VDC
FLC-3028G-8C4F-AC-T-X2	L3	16	12 SFP(8 combo)	90-264VAC redundant
FLC-3028G-8C4F-DC-T-X2	L3	16	12 SFP(8 combo)	12-48VDC redundant