

HNT-1401GP-X4 | Industrial Gigabit PoE+ Media Converter



FEATURE HIGHLIGHTS

- 1x 10/100/1000Base-T(X) Gigabit Ethernet port, compliant with IEEE 802.3at
- 1x 100/1000Base-(F)X SFP slots
- Support Link Fault Pass-Through (LFP) function
- Redundant power inputs 48-55VDC
- Rugged Metal Design with IP30
- Operating temperature range:
Standard: -10°C ~ 70°C, Extend: -40°C ~ 80°C

DESCRIPTION

HNT-1401GP-X4 is an industrial grade media converter. It provides 1x 10/100/1000TX full gigabit RJ-45 ports compliant with IEEE 802.3at PoE function and 1x 10/1000 SFP slot for your industrial applications. Designed with IP30 metal rugged case and operating temperature can be selected to support -40 to 80 degree C (-T model) to ensure the network reliability and works perfectly in extreme harsh environment.

HNT-1401GP-X4 also supports redundant power inputs 48~55 VDC. It is designed following industrial standards with din rail or wall mounting. The high power of PoE function provides flexibility and cost-efficient solution to create a communication network.

HNT-1401GP-X4 | Industrial Gigabit PoE+ Media Converter

SPECIFICATIONS

Technology	
Standards	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX Fast Ethernet IEEE 802.3ab 1000BaseT IEEE 802.3z 1000Base-X Gigabit Fiber IEEE 802.3af/at Power over Ethernet
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x flow control, back pressure flow control
Properties	
Switching Fabric (Back-Plane)	4Gbps
Memory Buffer	1 Mbits
Jumbo Frame	10Kbytes
MAC Table Size	8K
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port
Interface	
RJ45 Ports	1 * 10/100/1000Base-T(X) with PoE+ Auto-Negotiation, Full/Half Duplex, Auto-MDI/MDI-X
Fiber Port	1 * 100/1000Base-F(X) SFP slot
PoE Pin Out	V+, V+,V-,V-, for pin 1, 2, 3, 6 Endspan, MDI Alternative A
LED Indicators	Power Status LED, IEEE802.3af/at PoE Enabled LED, IEEE 802.3bt PoE Enabled LED Ethernet Ports: On-Link/Flash-data transmitting SFP: Link/Active
Dip Switch	DIP Switch 1: Link Fault Pass-Through (LFP) Enable/Disable DIP Switch 2: 100Mbps/1000Mbps

HNT-1401GP-X4 | Industrial Gigabit PoE+ Media Converter

SPECIFICATIONS

Power Requirements

Input Voltage	Dual 48-55VDC redundant power inputs
Power Connection	1*removable 4-contact terminal block
Power Consumption	Max. 3 Watts full loading
Max. PoE Power Budget	30 Watts

Mechanical Characteristics

Housing	Metal, IP30 protection
Dimensions (W x H x D)	26 x 95 x 75 mm (W x H x D)
Weight	Unit Weight: 0.25kg (0.55 lb), Shipping Weight: 0.45kg (0.99 lb)
Mounting	DIN-Rail Mounting, Wall Mounting

Environmental Limits


Operating Temperature	STD: -10°C ~ 70°C (14°F ~ 158°F) EOT: -40°C ~ 80°C (-40°F ~ 176°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)

Approvals

EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
EMS	CE EN55035/EN61000-6-2 Class A: IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant

HNT-1401GP-X4 | Industrial Gigabit PoE+ Media Converter

DIMENSIONS

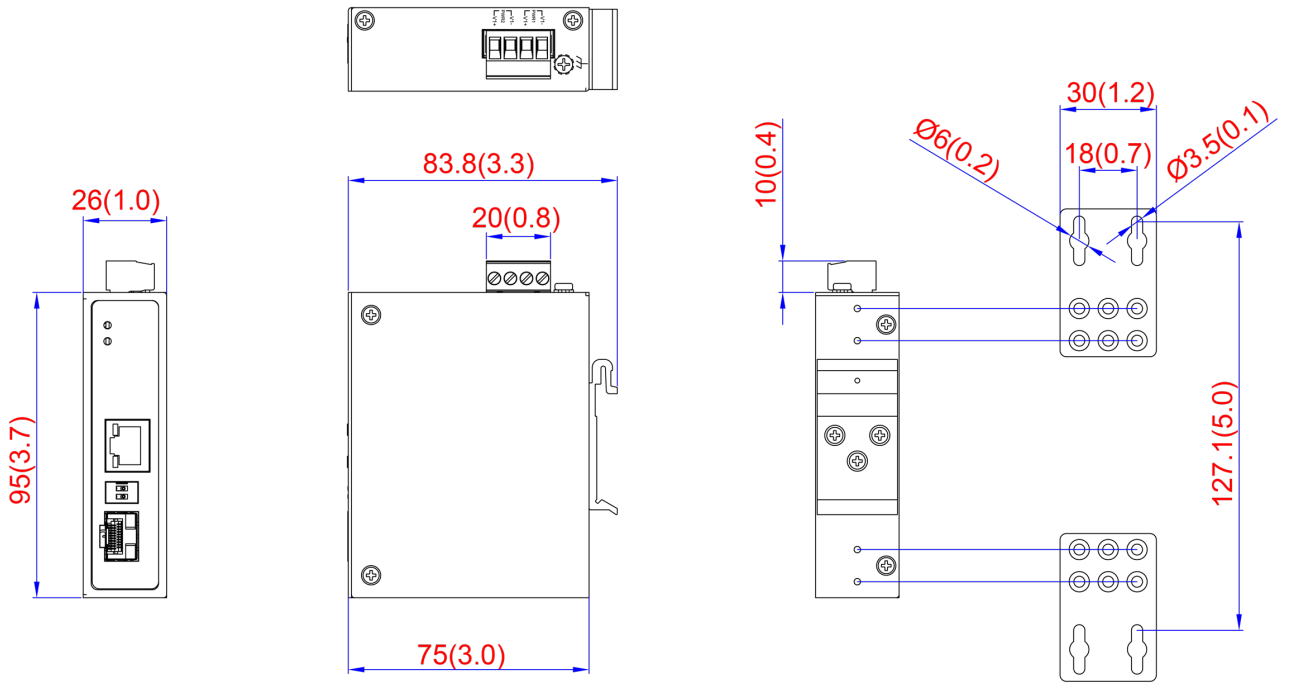

Unit: mm (inch)

Din-rail

Wall-mount

ORDERING INFORMATION

Model Name	10/100/1000T(X) 90W PoE	100/1000(F)X SFP	Power Inputs	Temperature
HNT-1401GP-X4	1	1	48-55VDC	-10~65°C
HNT-1401GP-T-X4	1	1	48-55VDC	-40~75°C